




Aprisa SR

SMART, SECURE POINT-TO-MULTIPOINT RADIO FCC and IC licensed bands



Aprisa SR: smart, secure, point-to-multipoint SCADA communications for oil, gas and utility monitoring and control

- **Secure:** with its defense in depth approach, including AES encryption, authentication, address filtering and user access control including RADIUS, the Aprisa SR protects against vulnerabilities and malicious attacks.
- **Future-proof:** the Aprisa SR supports dual serial and dual Ethernet ports in a single, compact form factor, designed to cryptographically secure legacy serial, protect existing device investment, and enable new applications. Old and new application protocols can be run side by side. New Modem 2 firmware allows mixed network operation with Aprisa SR+ at full speed – facilitating a seamless upgrade to 256 QAM operation.
- **Advanced L2 / L3 capabilities:** selectable L2 bridge, L3 router, or advanced gateway router combination L2 / L3 modes with VLAN, QoS, NAT, and filtering attributes to maximize capacity in constrained bandwidth and prioritize mission critical traffic while meeting tough security and IP network policy imperatives.
- **Flexible:** the Aprisa SR integrates into a range of network topologies, with each unit configurable as a base station, repeater or remote unit. Support for NMEA GPS receiver option.
- **Link efficiency:** forward error correction maintains the integrity of the wireless connection while an effective channel access scheme and IP routing ensures efficient transfer of data across the Aprisa SR network. Automatic Transmit Power Control maintains the minimum transmit power required for effective communications enhancing both frequency reuse and power savings. Advanced payload and Ethernet / IP / TCP / UDP header compression.
- **Reliable and robust:** the Aprisa SR requires no manual component tuning and maintains its performance over a wide temperature range using full specification industrially rated components and shared Aprisa family heritage. Modem 2 performance brings new levels of robust QPSK demodulation and large network improvements.
- **Easily managed:** an easy to use GUI supports local element management via HTTPS and remote element management over the air and SNMP support allows network-wide monitoring and control via a variety of supported third party network management systems.

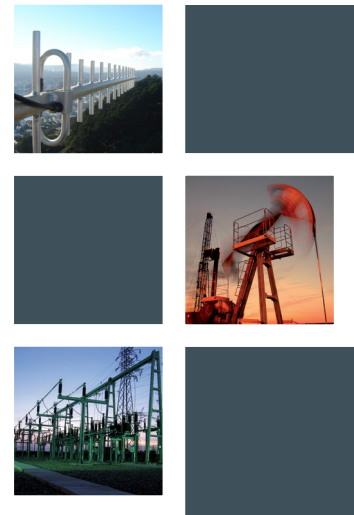

The Aprisa SR in brief

- Frequency bands of 135 – 175, 215 – 240, 400 – 520, 896 – 902 and 928 – 960 MHz
- RS-232 and IEEE 802.3 protocols
- Software selectable 12.5 kHz, 15 kHz, 25 kHz, 30 kHz, 50 kHz, and 100 kHz (note 2) channel sizes (frequency band dependent)
- Data rates of up to 144 kbit/s
- QPSK modulation with adaptive coding
- Mixed network operation with the Aprisa SR+
- Automatic Transmit Power Control: reduces interference in large networks, improves power savings
- Selectable error correction of min, max or no FEC
- AES-CCM to NIST SP 800-38C
- Ethernet and IP / TCP / UDP header compression (ROHC) and payload compression
- Software selectable dual / single antenna port operation
- Transparent to all common SCADA protocols
- Dedicated alarm port
- Optional USB connected GPS receiver
- Power optimized option
- Layer 2 bridge (VLAN aware), layer 3 router, and advanced gateway router combination L2/L3 modes
- VLAN tagging and Q-in-Q
- Flexible QoS priority enforcement – by port or traffic type, VLAN, PCP/DSCP, rule including SMAC/DMAC, IP address and IP protocol, and EtherType
- L2 / L3 / L4 filtering
- MEMS accelerometer motion sensing anti-tamper option
- Substation hardened to IEEE 1613 class 2 and IEC 61850-3
- 30 kV ESD antenna protection
- Class 1, Division 2 for hazardous protection
- -40 to +158 °F operational temperature
- 8.27" (W) x 5.12" (D) x 1.63" (H)
- FCC and IC standards compliant

Aprisa SR applications

- Offshore rigs and onshore pump jacks
- Transmission pipelines
- Electricity generation plants and turbines
- Power storage and distribution
- Water and waste processing plants

SYSTEM SPECIFICATION

GENERAL					
NETWORK TOPOLOGY	Point-to-multipoint (PMP), Master, Remote, Repeater				
NETWORK INTEGRATION	Serial and Ethernet (router or bridge mode)				
PROTOCOLS					
ETHERNET	IEEE 802.3, 802.1d/q/p				
SERIAL	Legacy RS-232 transport				
WIRELESS	Proprietary				
SCADA	Transparent to all common SCADA protocols such as Modbus, IEC 60870-5-101/104, DNP3 or similar				
RADIO					
FREQ BAND	TUNING RANGE	TUNE STEP			
FREQUENCY RANGE	135 MHz	135 – 175 MHz	0.625 kHz		
	220 MHz	215 – 240 MHz	0.625 kHz		
	400 MHz	400 – 470 MHz	1.25 kHz		
	450 MHz	450 – 520 MHz	6.25 kHz		
	896 MHz	896 – 902 MHz	6.25 kHz		
	928 MHz	928 – 960 MHz	6.25 kHz		
CHANNEL SIZE	12.5 kHz, 25 kHz, 50, 100 kHz software selectable				
DUPLEX	Single frequency half-duplex Dual frequency half-duplex Half duplex remote with SR+ full duplex base station				
FREQUENCY STABILITY	± 0.5 ppm				
FREQUENCY AGING	< 1 ppm / annum				
TRANSMITTER					
MAX PEAK ENVELOPE POWER (PEP)	10.0 W (+40 dBm)				
AVERAGE POWER OUTPUT	0.01 – 5.0 W (+10 to +37 dBm, in 1 dB steps)				
ADJACENT CHANNEL POWER	< –60 dBc				
TRANSIENT ADJACENT CHANNEL POWER	< –60 dBc				
SPURIOUS EMISSIONS	< –37 dBm				
ATTACK TIME	< 1.5 ms				
RELEASE TIME	< 0.5 ms				
DATA TURNAROUND TIME	< 2 ms				
RECEIVER	12.5 kHz	25 kHz	50 kHz	100 kHz	
SENSITIVITY (BER < 10 ⁻⁶) max coded	QPSK	–115 dBm	–112 dBm	–109 dBm	–106 dBm
ADJACENT CHANNEL SELECTIVITY		> –47 dBm	> –37 dBm	> –37 dBm	> –37 dBm
	(Note 1)	[> 48 dB]	[> 58 dB]	[> 58 dB]	[> 58 dB]
CO-CHANNEL REJECTION max coded	> –10 dB				
INTERMODULATION RESPONSE REJECTION	> –35 dBm [> 60 dB Note 1]				
BLOCKING OR DESENSITISATION	> –17 dBm [> 78 dB Note 1]				
SPURIOUS RESPONSE REJECTION	> –32 dBm [> 63 dB Note 1]				
MODEM	12.5 kHz	25 kHz	50 kHz	100 kHz	
GROSS DATA RATE	QPSK	20 kbit/s	32 kbit/s	72 kbit/s	144 kbit/s
OCCUPIED BANDWIDTH		11.8 kHz	19.8 kHz	43.0 kHz	88.0 kHz
FORWARD ERROR CORRECTION	Variable Reed Solomon plus convolutional code				

SECURITY	
DATA ENCRYPTION	256, 192 or 128 bit AES
DATA AUTHENTICATION	CCM
INTERFACES	
ETHERNET PORTS	2 port RJ45 10/100Base-T auto-neg MDI/MDIX
SERIAL PORTS	2 port RJ45 RS-232 Additional RS-232 / RS-485 port via USB converter (optional)
GPS RECEIVER	Support for optional USB connected GPS receiver
MANAGEMENT	1 x USB micro type B (device port) 1 x USB standard type A (host port) 1 x Alarm port RJ45
ANTENNA	1 x TNC 50 ohm female (2 x TNC for dual antenna port)
LEDs	Status: OK, MODE, AUX, TX, RX Diagnostics: RSSI, traffic port status
TEST BUTTON	Toggles LEDs between diagnostics / status
PRODUCT OPTIONS (specified at order)	
ANTENNA PORT OPTION	Single antenna port or dual antenna port
POWER	
INPUT VOLTAGE	10 – 30 VDC
RECEIVE	All bands < 3 W (217 mA at 13.8 VDC) in active receive state < 2 W (145 mA at 13.8 VDC) in idle receive state < 0.5 W (36 mA at 13.8 VDC) in sleep mode
TRANSMIT	135 and 220 MHz < 26 W (1884 mA at 13.8 VDC) 400, 450, 896, 928 MHz < 28 W (2028 mA at 13.8 VDC)
MECHANICAL	
DIMENSIONS	210 mm (W) x 130 mm (D) x 41.5 mm (H) 8.27" (W) x 5.12" (D) x 1.63" (H)
WEIGHT	1.25 kg (2.81 lbs)
MOUNTING	Wall, Rack or DIN rail
ENVIRONMENTAL	
OPERATING TEMPERATURE	–40 to +70 °C (–40 to +158 °F)
HUMIDITY	Maximum 95 % non-condensing
MANAGEMENT & DIAGNOSTICS	
LOCAL ELEMENT	SSH and HTTP/S web servers with full control / diagnostics Partial diagnostics via LEDs and test button Software upgrade from PC or USB flash drive
REMOTE ELEMENT	SSH and HTTP/S over-the-air remote element management with control / diagnostics Network software upgrade over-the-air
NETWORK	SNMPv2 and SNMPv3 security support for integration with external network management systems
COMPLIANCE	
RF	12.5 kHz, 25 kHz, 50 kHz FCC CFR47 Part 90, IC RSS 119
	100 kHz FCC CFR47 Part 24, IC RSS 119
EMC	FCC CFR47 Part 15, EN 301 489-5, ICES-003
SAFETY	UL / EN 60950 Class 1 div 2 for hazardous locations
ENVIRONMENTAL	ETS 300 019 Class 3.4, IEEE 1613 Class 2 IEC 61850-3, Ingress Protection IP51

Notes:

- The receiver figures are shown in typical fixed interference dBm values and dB values [in brackets] relative to the sensitivity. Relative values are given for QPSK modulation and max coded FEC. Refer to the Aprisa SR User Manual for a complete list of modulation and coding levels.
- The gross data rate for the 12.5 kHz channel size in the 896 / 928 MHz bands varies with regulatory compliance.

ABOUT 4RF

Operating in more than 150 countries, 4RF provides radio communications equipment for critical infrastructure applications. Customers include utilities, oil and gas companies, transport companies, telecommunications operators, international aid organisations, public safety, military and security organisations. 4RF point-to-point and point-to-multipoint products are optimized for performance in harsh climates and difficult terrain, supporting IP, legacy analogue, serial data and PDH applications.

Copyright © 2022 4RF Limited. All rights reserved. This document is protected by copyright belonging to 4RF Limited and may not be reproduced or republished in whole or part in any form without the prior written consent of 4RF Limited. While every precaution has been taken in the preparation of this literature, 4RF Limited assumes no liability for errors or omissions, or from any damages resulting from the use of this information. The contents and product specifications within it are subject to revision due to ongoing product improvements and may change without notice.

Aprisa and the 4RF logo are trademarks of 4RF Limited.



For more information please contact
EMAIL sales@4rf.com
URL www.4rf.com

Version 2.8.0